

**Compatible appliances**

- Greenstar 8000iW Lifestyle Combi range appliances (30 - 45kW)
- Greenstar 8000iW Lifestyle System range appliances
- Greenstar CDi Classic Combi range appliances
- Greenstar CDi Classic System range appliances

**NOTICE:****Intended use**

- ▶ Do not use with any other model of appliance other than the range of appliances listed above.
- ▶ Read these instructions with the appliance Installation and Maintenance Instruction manual.

**Checklist**

Instructions pre-piping assembly kit	1
Central Heating flow pipe	1
Domestic Hot Water pipe <sup>1)</sup>	1
Gas pipe	1
Domestic Cold Water pipe <sup>1)</sup>	1
Central Heating return pipe	1

1) Pipes are not required when used with System appliances

Table 1 Checklist

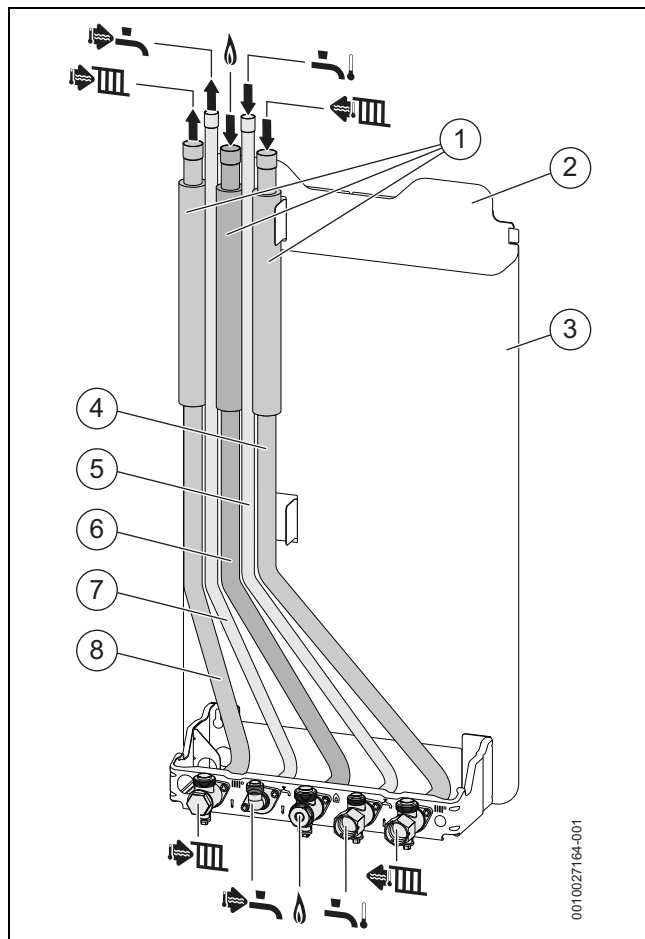
**Installation**

Fig. 1 Vertical pre-piping assembly

**Key to figure 1**

1	Foam insulation
2	Hanging bracket
3	Wall mounting plate
4	Central Heating return pipe
5	Domestic Cold Water pipe <sup>1)</sup>
6	Gas pipe
7	Domestic Hot Water pipe <sup>1)</sup>
8	Central Heating flow pipe

1) Pipes are not required when used with System appliances

Table 2 Key to figure 1

The Greenstar vertical pre-piping assembly kit allows the appliance to be plumbed from above.

The pre-formed pipes are designed to fit neatly between the appliance and wall mounting plate.

- ▶ Refer to the appliance's Installation and Maintenance Instructions concerning the mounting of the wall frame.
- ▶ Attach the wall mounting template to the wall in the required position and drill the mounting holes.
- ▶ Fit appropriate wall plugs into the mounting holes.
- ▶ Mount the wall frame, but do not secure the two bottom mountings completely, leave about 10mm of play at the bottom of the frame, which will allow the preformed pipes to be fitted more easily.
- ▶ Use the identification labels on the pipes to ensure that the pipes are fitted in the correct position.
- ▶ Put the compression nuts and olives on each pipe.
- ▶ Do not cut any of the pipes.
- ▶ Attach the pipes to the valves using the olives and compression nuts and tighten firmly.
- ▶ Finally, secure the bottom wall frame mounting screws.

**[en] Important notes on installation/assembly**

The installation/assembly must be carried out by a qualified contractor, following these instructions and in compliance with the applicable regulations. Noncompliance with specifications can result in material damage and/or personal injury or fatality.

- ▶ Check that the contents of the delivery are undamaged. Only fit undamaged parts.
- ▶ Follow the applicable instructions for the other system components, accessories and spare parts.
- ▶ Before starting any work: disconnect the system from the power supply across all phases.
- ▶ Install all parts described for the device concerned.
- ▶ Do not reuse any parts that have already been fitted and replaced.
- ▶ Perform the required adjustments, functional tests and safety tests.
- ▶ Test any joints that carry gas, flue gas, water or oil for leaks.
- ▶ Document any alterations made.