



Compress 5800i Installer guide

The future of home heating

! P U M P I T U P !



Installer
guide



PUMP IT UP



Options for heat pump or hybrid heat pump systems

Welcome to the future of heat pump and hybrid heat pump technology.

A world of modern design, electrified heating and easy installation. A world where home heating looks, sounds, fits, and performs better than ever before.

Designed for UK homes, the CS5800i is designed for new build and renovation projects alike – making it easier than ever to bring electrified heating solutions to your customers.

Contents

CS5800i outdoor unit – Overview	5
CS5800i outdoor unit – Features	6
CS5800i hybrid unit – Overview	8
CS5800i hybrid unit – Features	10
CS5800i wall hung unit – Overview	13
CS5800i wall hung unit – Features	14
System set ups	16
Clearances	17
Heating performance	18
CS5800i controls	20
CS5800i training	21
Accessories and technical data	22

Quiet, stylish design

Our easier on the eye outdoor unit



A heat pump for a new era of home heating, the CS5800i outdoor unit is the future of home heating. The CS5800i has modern design and easy installation all built in – it's a heat pump with a big impact.

It makes your life easier through its monobloc design, so you can access the control box, condenser, and evaporator easily – and carry out your installations quickly.

Your customers can relax too, knowing the CS5800i is Quiet Mark certified and barely makes as much noise as their kitchen refrigerator.

Add to this a low global warming potential and the CS5800i outdoor unit is definitely something to get pumped about.

Key features:

Ultra quiet

With integrated diffuser and Quiet Mark certified

Compact

Stunning modern design and simple to install

High performance

Flow temperatures up to 75°C for wider range of UK homes & SCOP up to 4.54

Low GWP

R290 refrigerant has a low global warming potential score of only 3

Flexible

Perfect for renovation projects and new build, with a range of compatible indoor units

Design


All the style and maximum reliability you've come to expect from Bosch.



*Terms and conditions apply, training required for maximum guarantee length.
Visit the website for more information <https://www.worcester-bosch.co.uk/heat-pumps/tc>

CS5800i outdoor unit

Features

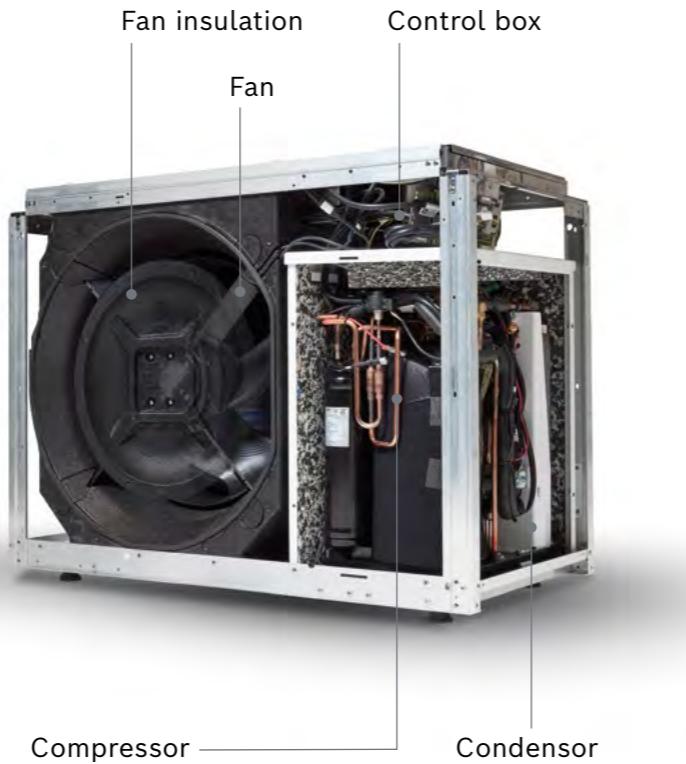

Our quietest outdoor unit ever

With a built-in sound diffuser and insulated fan, the volume of this outdoor unit is almost unnoticeable.

Producing from 40dB(A)*, somewhere between birdsong and the quiet hum of a refrigerator, your customer and their neighbours won't even know there's a heat pump hard at work. And with the sleek design, it will compliment its surroundings too.




Easy to fit

F-Gas-free fitting, with rear facing connectors and monobloc design meaning simple installation.



Easy to access

Just remove a few screws to get to the control box and main components.

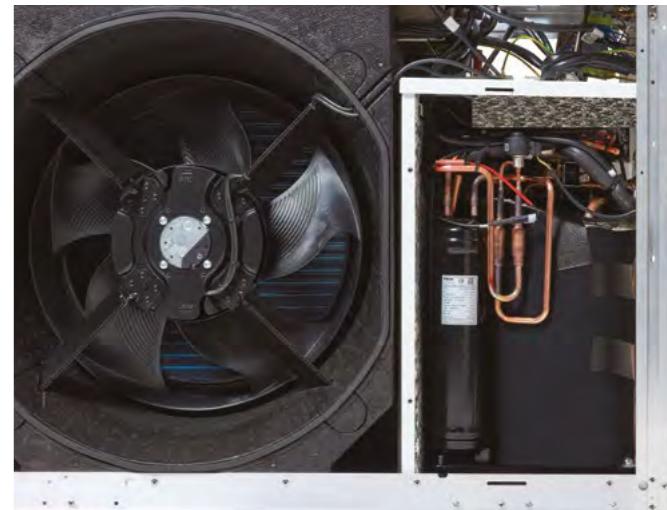

Flexible siting

Choose the best place for the unit, with flexible installation options and compatibility with most homes and heating systems, no matter the age.



High performance refrigerant

R290 refrigerant delivering high performance and a global warming potential of only 3.

Compact, flexible, simple.

Our intelligent wall hung hybrid unit



The future of electrified home heating is here, with the plug-and-play hybrid partner for our CS5800i Heat Pump.

Co-created with installers and built for fast, simple, plug-and-play installation, the compact CS5800i Hybrid Heat Pump puts electrified heating straight into the homes of your customers – by connecting the heat pump and gas boiler and optimising how they deliver year-round, lower carbon[^] heating.

Effortlessly define your hybrid strategy and effortlessly monitor energy consumption from the choice of hybrid system controls.

The new hybrid unit is clever in other ways too. Installed indoors or out, requiring no system upgrades and small enough to fit where you like, it's perfect for when you're short on installation space. It's the hybrid solution your customers have been waiting for.

Key features:

Flexible design

Indoor or outdoor positioning for added flexibility

Space saving

No buffer tank or system upgrades required

Easy

Rapid, add-on installation means no loss of service

Smart

Intelligent energy management for maximum efficiency.

Compatible

Works with new or existing (up to 32kW) Greenstar Combi 8000+, 4000, 2000, 1000, CDi Compact, CDi Classic, Si Compact, i ErP, Heatslave II and Danesmoor Utility (ErP+, 2022+).




[^]A hybrid heat pump when running emits less carbon dioxide than a gas or oil boiler only system.

*Terms and conditions apply, training required for maximum guarantee length.
Visit the website for more information <https://www.worcester-bosch.co.uk/heat-pumps/tc>

CS5800i Hybrid unit

Features

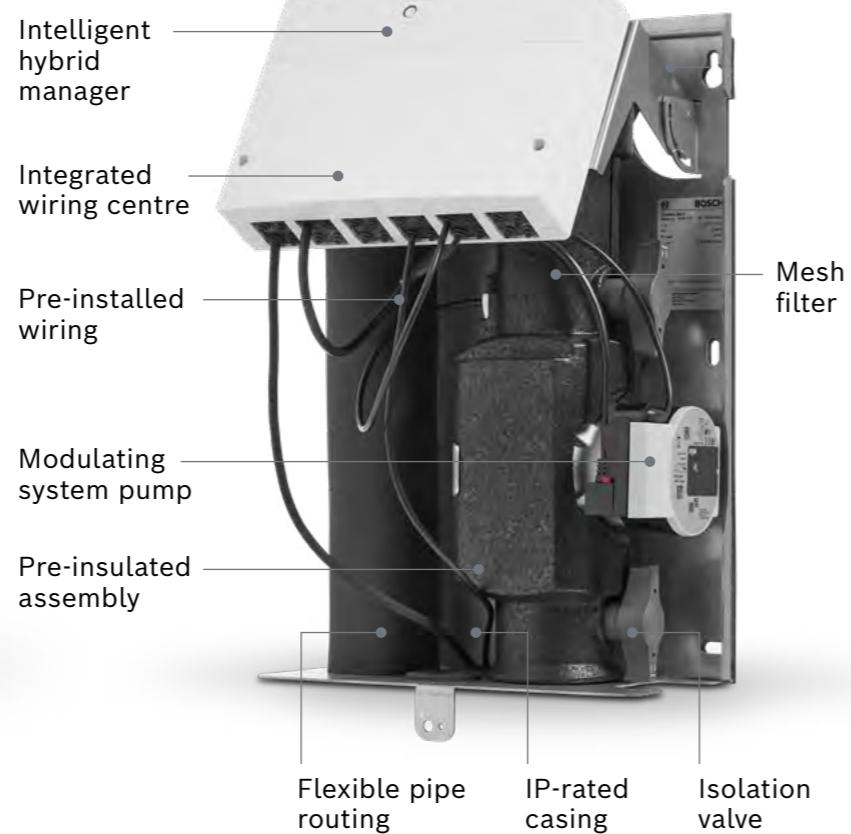

Rapid installation

Pre-assembled for rapid installation with easy fit, plug-and-play unit, to existing Worcester Bosch combi boilers* with no loss of service.



Fits in at home

Small in size with indoor or outdoor installation options to suit your customers lifestyle.



Clever

Uses intelligent energy management to modulate and run the boiler and heat pump in parallel to maximise efficiency. Control options with a choice of either the CH120 or EasyControl.



Comfort

Embrace cost-effective, smarter, year-round comfort with no requirement for a separate buffer tank or need to replace existing radiators or pipework.

Connected, compact, flexible. Our stylish wall hung unit



The CS5800i wall hung unit brings simplicity and technology perfectly together.

Incorporating Bosch modern design alongside accessibility – with easy access, installation, and integration with existing home-heating systems – this one has the beauty and the brains.

And, with the Connect-Key K40 connectivity comes as standard with the wall hung CS5800i, which links seamlessly with the Bosch HomeCom Easy app for easy control and to request remote monitoring**.



*Terms and conditions apply, training required for maximum guarantee length.
Visit the website for more information <https://www.worcester-bosch.co.uk/heat-pumps/tc>

**Monitoring may cease automatically after 12 months.

Key features:

Easy access

Engineer-focused design, allows immediate access to the control box

Flexible design

Ability to use third-party cylinders and components

Interactive


Built-in colour intuitive touchscreen for easy use

Connected

Remote monitoring** and access with Connect-Key K40 and Bosch HomeCom Easy app.

CS5800i wall hung unit

Features

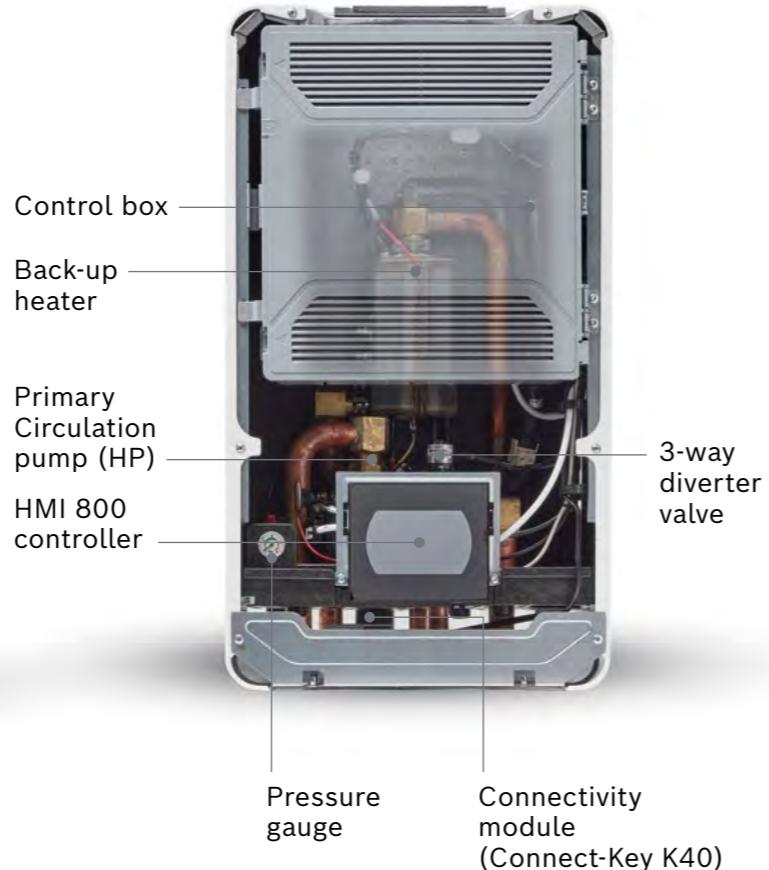

Modern design

Designed and engineered to be stylish and reliable – wherever it's installed.

The CS5800i also comes with a built-in colour intuitive touchscreen, for easy configuration inside the home.



Back-up heater

The CS5800i wall hung unit comes with a built-in 3kW electric heater, which provides a fail-safe back-up when the weather is at its coldest.



Connectivity

Give your customers complete heating control wherever they are by plugging in the Connect-Key K40 included in this unit and download the Bosch HomeCom Easy app.



Easy to access

For servicing and installation, it's just a removal of screws to get to the control box and the other main components.

System set-ups

The following information shows some possible system configurations and the necessary minimum clearances.

Hybrid heat pump system

Outdoor unit, with hybrid unit, boiler*, and system controller.



Heat pump system


Outdoor unit with indoor unit and cylinder.



*New or existing (up to 32kW) Greenstar Combi 8000+, 4000, 2000, 1000, CDi Compact, CDi Classic, Si Compact, i ErP, Heatslave II and Danesmoor Utility (ErP+, 2022+).

Clearances





Front: 2,000mm (800mm*) Rear: 400mm (200*)
Left/Right: 1,000mm (2,000mm to wall or 400mm*)

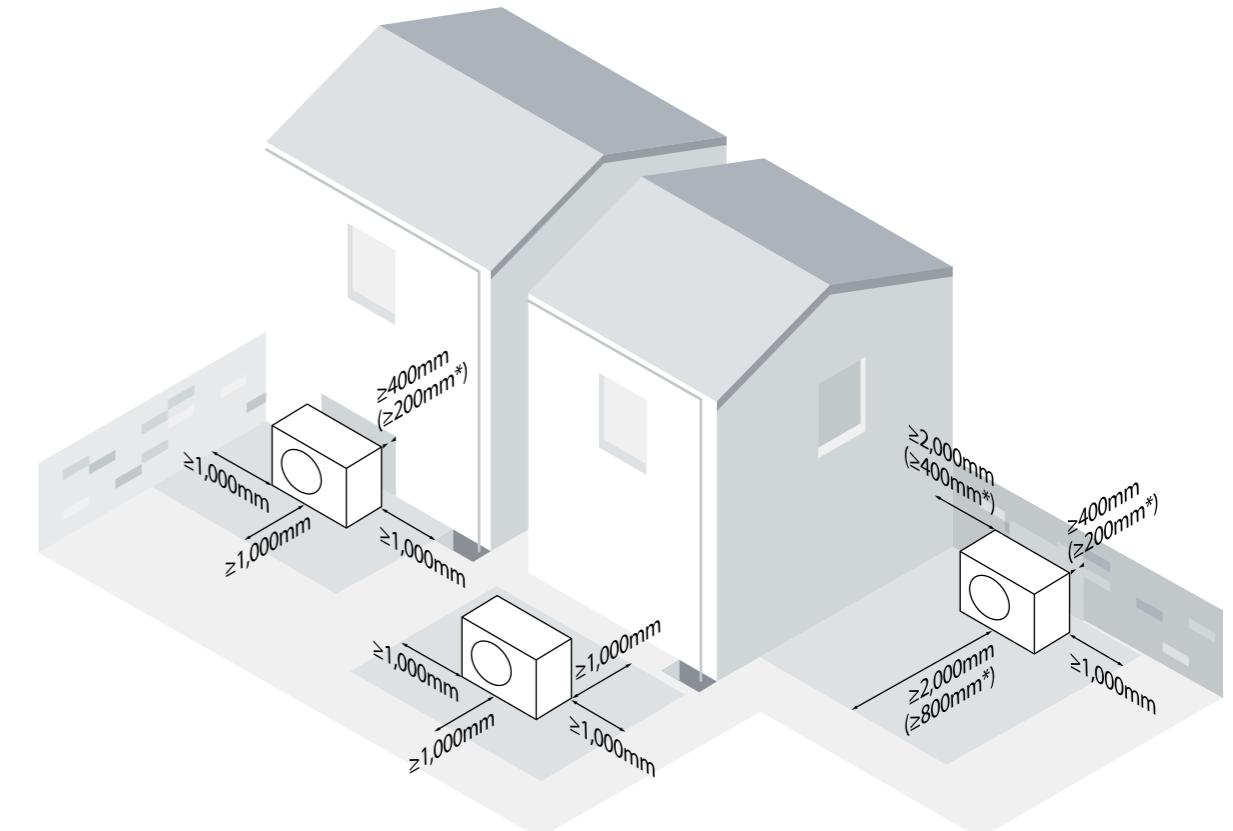

*Minimum distance: The clearance can be reduced to the minimum clearance on one side and either the front or rear. There must be no house openings (windows, doors, light shafts) and electrical sources of ignition (sockets, lamps, electric switches) within the protected area.

Heating performance

These graphs explain the output performance variations of each CS5800i at various flow temperatures. They show the maximum output power in kW, at various outdoor and water flow temperatures. This information will help you to select the most appropriate model for your customers home.

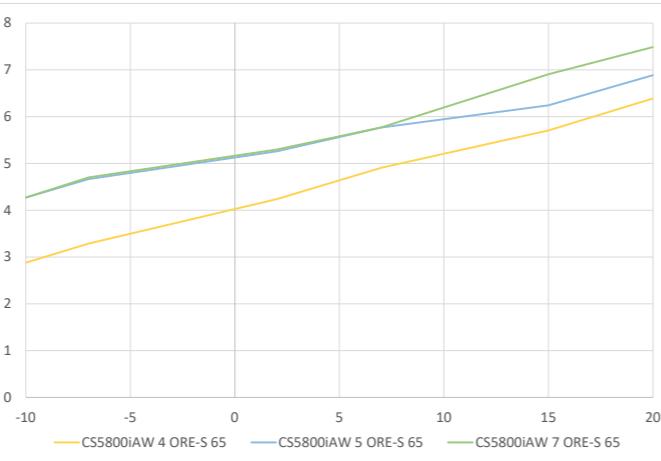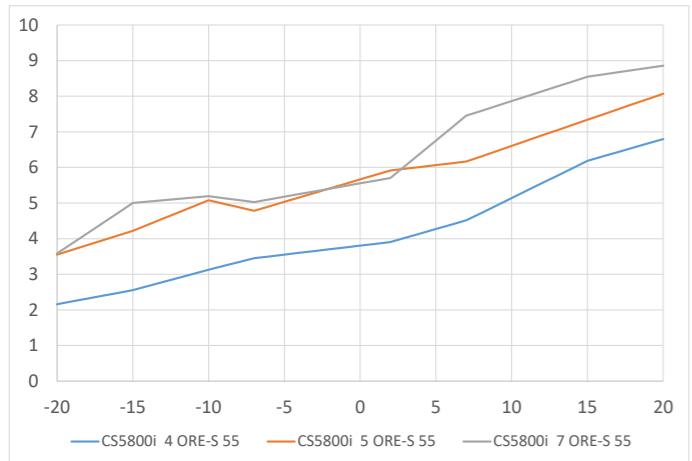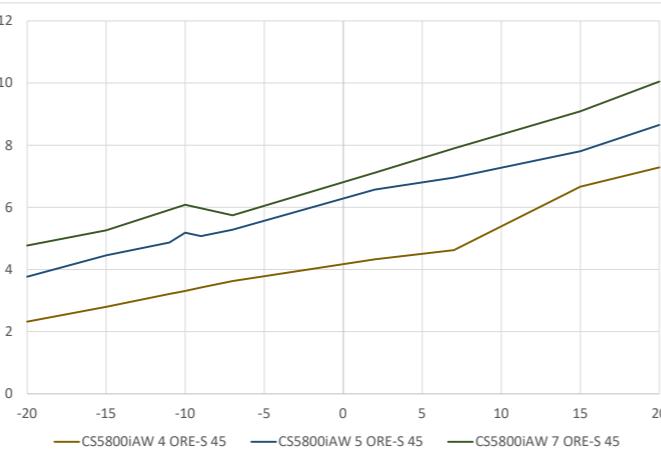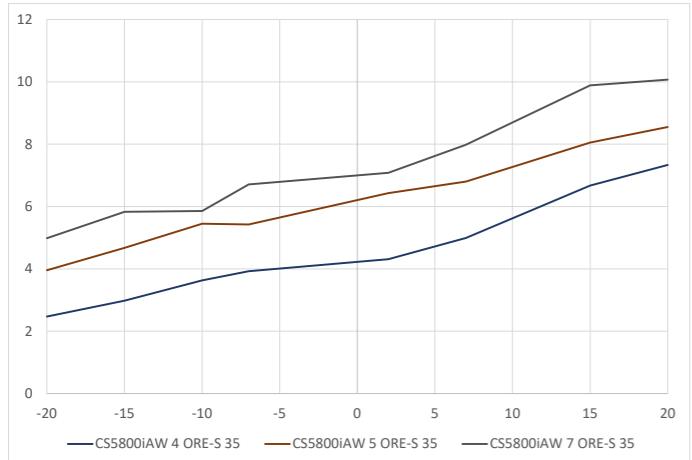

Connected and in control

Intelligent controls range



Put the power in the hands of your customer with our range of controls.

Optional heat pump controls



CR11H (wired)

Simple to use room thermostat with humidity sensor and clear display.



CR20RF (wireless)

Wireless room thermostat, which works alongside the Connect-Key K30.



RT800 (wired)

Wired room thermostat, for the easiest and most immediate heating control.

Choice of hybrid heat pump controls



CH120 (wired)

Set the hybrid system strategy and monitor energy consumption with the CH120 system control.



EasyControl (wired)

Internet connected programmable control to manage the hybrid system from a smart device using the Bosch EasyControl app.

CS5800i training

Are you ready for the heating revolution?

Wherever you are in your electrified home heating journey, from starting out to adding to your heat pump expertise we can support you with these solutions.

Start your MCS journey with Worcester Bosch

Becoming MCS certified is a mark of your excellence as an installer.

We're here to support you with our range of MCS courses including:

- ▶ Water regulations certification (WRAS) course
- ▶ Level 3 Award Low temperature heating and hot water systems in dwellings
- ▶ Level 3 Award RQF installation and maintenance of air source heat pump systems.

Not MCS certified?

We can support you with unlocking government grants and extended guarantees.

If MCS isn't right for your business right now, you can use our third party MCS umbrella scheme – who will handle the design, training and MCS accreditation paperwork to enable your customer to apply for government grants.

Contact our pre-sales team to find out more:
0330 123 3366.

Installing heat pumps doesn't need a specific qualification, but our complementary product training will help you get hands-on experience and understand all the features and benefits, specification, installation, and servicing.



Explore our product training

Accessories & technical data

Accessories

Part Number	Description
8738206696	Alarm buzzer
7716161061	50l buffer
7735500777	120l buffer
8738214739	INPA Short (200mm – 400mm)
8738214740	INPA Long (500mm – 10000mm)
7747204698	Dew point sensor
8738214741	Floor stand small
8738214742	Small stand covers
8738205073	Bracket kit for MM100
8750743753	Wall-mount small
7738110140	MM100 Mixer
8738206183	CANbus cable 15m
8738206184	CANbus cable 30m
8738214748	Condensation heating cable 2.5m
8738214749	Condensation heating cable 3.5m
8738214750	Condensation heating cable 5.5m
7738112943	CR20RF
7738112961	RT800
7738112972	CR11H
8738214418	DHW tower hot water circulation pipe
7735502289	DHW cylinder sensor R60
7736601142	Pump Group HS25/6 s BO
7736601144	Pump Group HS25/6 BO
7736601148	Pump Group HSM25/6 BO
7736601151	Pump Group HS25/6 MM100 BO
7736601155	Pump Group HSM25/6 MM100 BO

Wall hung unit

Model	Part number	Dimensions WxHxD
AWE 12 E	8738214990	400mm x 720mm x 297mm

Clearances:

Front: 800mm, Left/Right: 50mm, Top: 550mm

Hybrid unit

Model	Part number	Dimensions WxHxD
CSH5800iAWO	8732963437	330mm x 499mm x 170mm

Hybrid heat pump system accessories

Part Number	Description
7738112982	CH120
7736701392	EasyControl Black
7736701341	EasyControl White

System options

Output kW	Optional controls		
	Wall Hung Unit	RT800	CR20RF
4	Y	Y	Y
5	Y	Y	Y
7	Y	Y	Y

CS5800i outdoor units

Model	CS5800i 4 OR-S	CS5800i 5 OR-S	CS5800i 7 OR-S
Part number	8738213464	8738213465	8738213466
Power supply	230v	230v	230v
Dimension (WxHxD) mm	1100 x 800 x 540	1100 x 800 x 540	1100 x 800 x 540
Weight (Kg)	143	143	143
Clearances	<p>Front: 2m (800mm*) Left/Right: 1m (2m to wall or 400mm*) Rear: 400mm (200mm*)</p> <p>*Minimum distance: The clearance can be reduced to the minimum clearance on one side and either the front or rear. There must be no house openings (windows, doors, light shafts) and electrical sources of ignition (sockets, lamps, electric switches) within the protected area.</p>		
Sound power in accordance with EN 12102	40	42	42
Fuse (A)	16	16	16
Refrigerant	R290	R290	R290
Max flow temperature	75°C	75°C	75°C
SCOP @ 35°C (MCS)	4.53	4.53	4.54
SCOP @ 45°C (MCS)	3.82	3.90	3.96
SCOP @ 55°C (MCS)	3.03	3.28	3.29
Max output @-7/35 [kW]	3.92	5.42	6.71
COP max output @-7/35	2.89	2.51	2.36
Max output @7/35 [kW]	4.99	6.8	7.97
COP max output @7/35	3.59	3.16	3.07
Nominal output @7/35 [kW]	2.84	2.84	2.84
COP nominal output @7/35	4.85	4.85	4.85

Get in touch

Sales

Tel: 0330 123 9669

Email: sales.bosch@uk.bosch.com

Technical Helpline (Pre & Post Sales)

Tel: 0330 123 3366

Email: technical-advice@uk.bosch.com

Spare Parts

Tel: 0330 123 9779

Email: spares.mailbox@uk.bosch.com

Share

We would love to see your installations!

 WorcesterBosch Professional

 @WorcesterBosch Professional

 Worcester Bosch

 Worcester Bosch Group

Worcester Bosch

Cotswold Way

Warndon

Worcester

WR4 9SW

worcester-bosch.co.uk

Calls to and from Bosch Thermotechnology Ltd may be recorded for training and quality assurance purposes. Worcester Bosch is a brand name of Bosch Thermotechnology Ltd. This brochure is accurate at the date of printing, but may be superseded and should be disregarded if specification and/or appearances are changed in the interest of continued improvement. The statutory rights of the consumer are not affected.



8 716 122 777 D 01/26