

TIMESWITCH INSTRUCTIONS FOR GREENSTAR 27 HE COMBI & Si II SERIES

Gas Safety (Installation and use) Regulations 1988: All gas appliances must be installed by a competent person, in accordance with the above regulations. Failure to install the appliance correctly could lead to prosecution. The manufacturers notes must not be taken, in any way, as overriding statutory obligations.

IMPORTANT; Read these instructions carefully in order to get the best from your appliance.

WARNING; This appliance must be earthed and protected by a 3A fuse if a 13A plug is used, or if any other type of plug is used, by a 5A fuse either in the plug or adaptor or at a distribution board.

TO FIT THE TIMESWITCH

Warning; Switch off the power supply to the appliance before starting work.


Remove boiler white case.

Remove the facia cover plate by releasing the clip at the top and withdraw it from the front.

Present the programmer to the facia and plug in the programmer connector into the four way connection on the board. See Fig. 1.

Push the programmer into position ensuring that the lead is not trapped and that the clip has been properly engaged.

Replace white case.

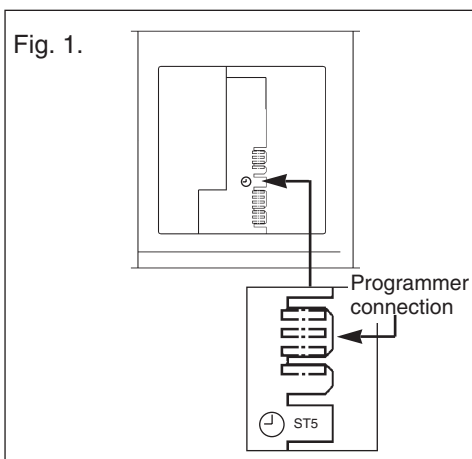

TO SET THE TIMESWITCH

The timeswitch is a 24V single channel unit which controls the operation of the central heating circuit (the domestic hot water is permanently available upon demand and will always take priority over central heating). The time clock is a 24 hour unit with on/off tappets available at 15 minute intervals.

Time Adjustment

See Fig.2. Turn the dial clockwise until the correct time is at the pointer.

Switch Adjustment

To set the ON periods push the tappets towards the centre from the start of the period to the end of the period.


Using the Manual Selector:

I Permanent on

 Time according to the tappets

0 Permanent off

Fig. 2.

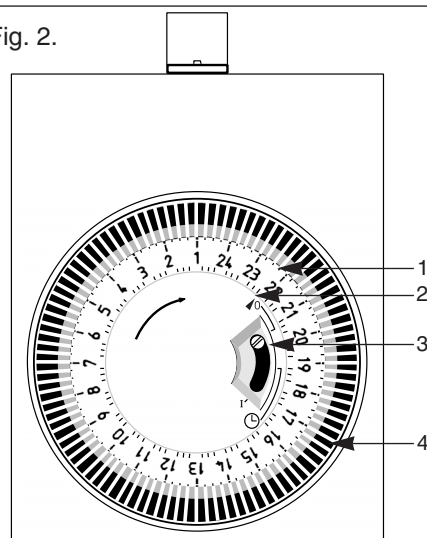

- 1 Dial
- 2 Time Pointer
- 3 Manual Selector
- 4 Tappets